




KEYED JOINT DETAIL

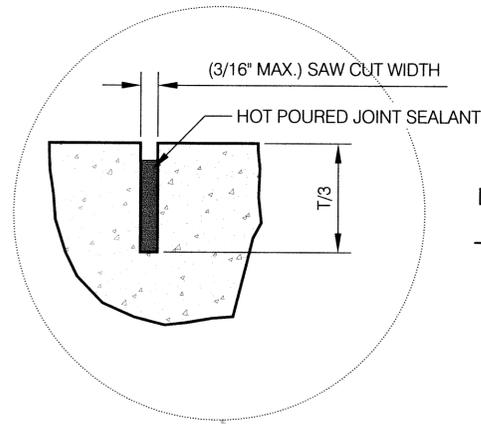


LONGITUDINAL JOINT DETAIL

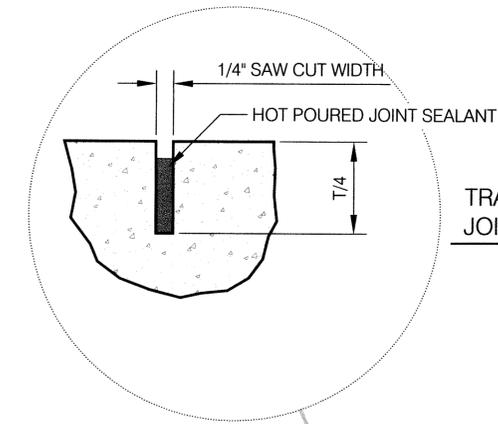


TRANSVERSE JOINT DETAIL

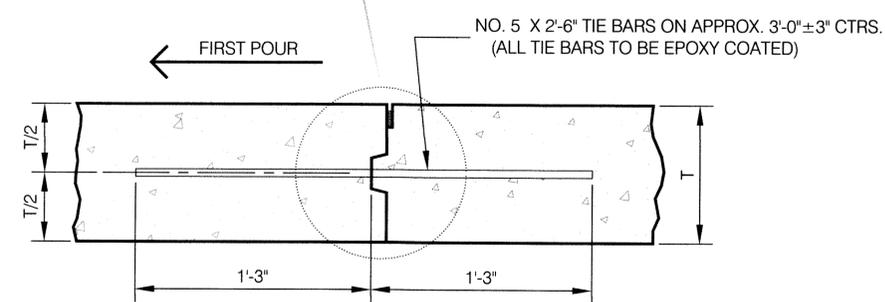


KEYED JOINT LONGITUDINAL AND LUG-OUT TYPES

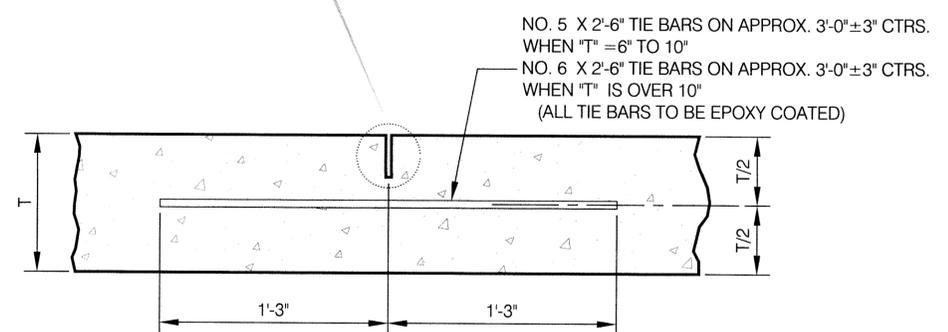

SAWED LONGITUDINAL JOINT


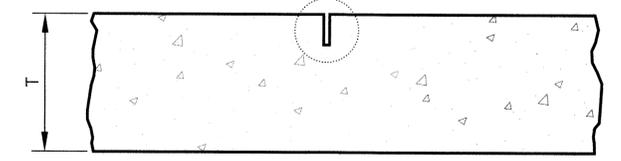


SAWED TRANSVERSE CONTRACTION JOINT

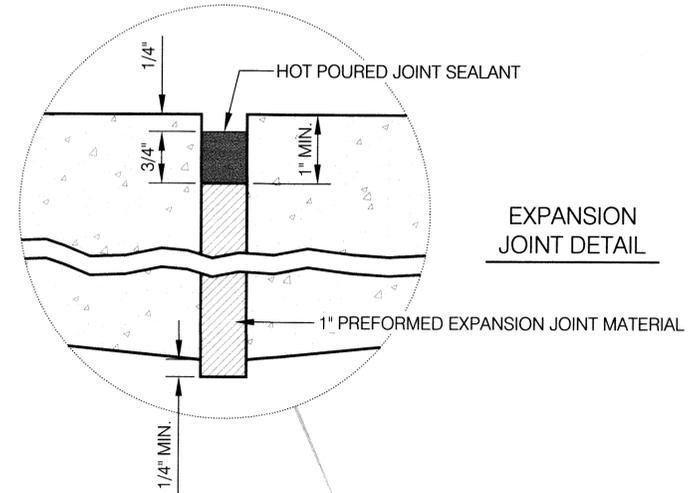


EXPANSION JOINT DETAIL

1/4\"/>

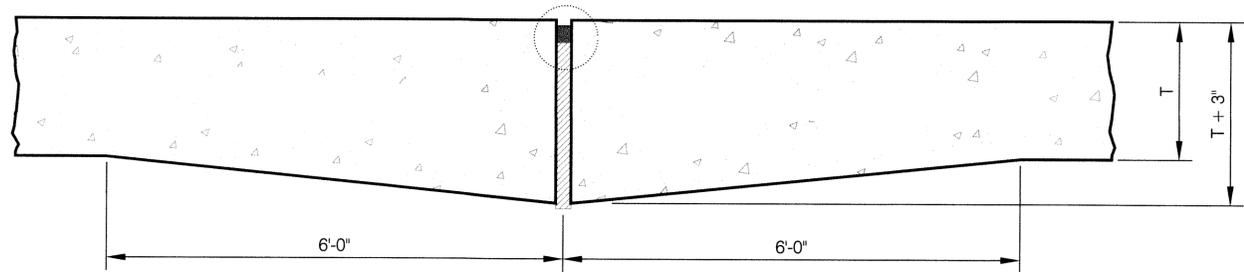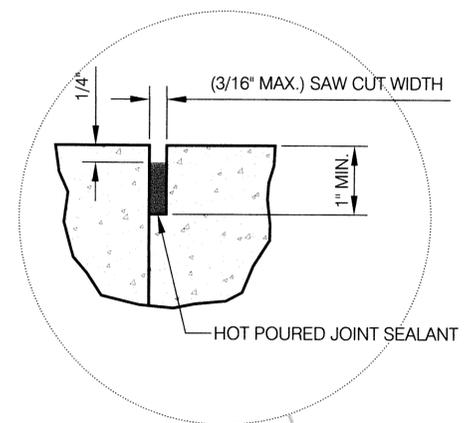

EXPANSION JOINT

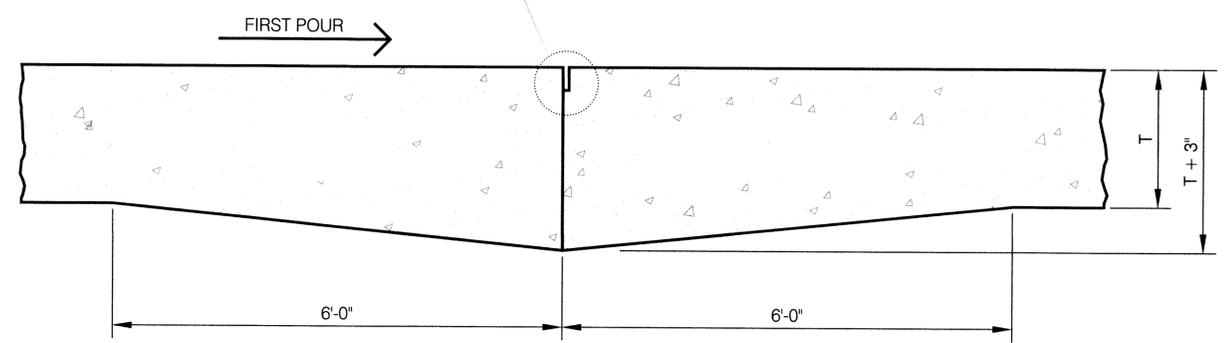

TRANSVERSE CONSTRUCTION JOINT

NOTES

1. CONSTRUCT CONCRETE PAVEMENT IN ACCORDANCE WITH SECTION 500 OF THE STANDARD SPECIFICATIONS. PREPARE SUBGRADE IN ACCORDANCE WITH SECTION 200.
2. WHEN TWO ADJACENT LANES ARE PLACED AT THE SAME TIME THE LONGITUDINAL JOINT COMMON TO BOTH SHALL BE THE SAWED TYPE. THE KEYED TYPE LONGITUDINAL JOINT SHALL BE USED WHEN AN ADJACENT LANE IS NOT PLACED AT THE SAME TIME.
3. ALL EXPANSION JOINT MATERIAL AND SAWED TRANSVERSE JOINTS SHALL BE CONTINUOUS ACROSS THE PAVEMENT AND EXTEND THROUGH CURBS.
4. REINFORCING SHALL BE PLACED WITH A TOLERANCE OF -1/4" AND +1/2" ON CLEARANCE.

			CITY OF OMAHA PUBLIC WORKS DEPARTMENT	STANDARD PLATE 500-50	SHEET 1/1
			CONCRETE PAVEMENT JOINTS	ISSUE DATE: DECEMBER 10, 2013	