



CONCRETE MEDIAN SAFETY NOSE PLAN

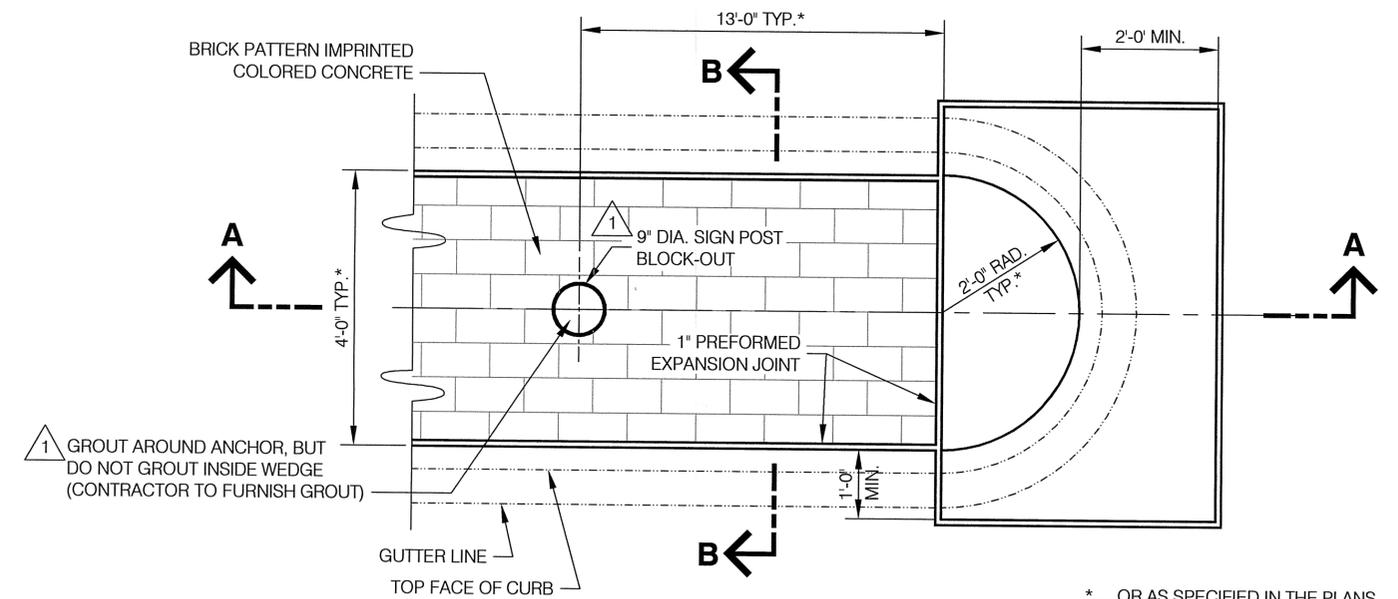


CONCRETE MEDIAN NOSE PLAN


*... OR AS SPECIFIED IN THE PLANS.

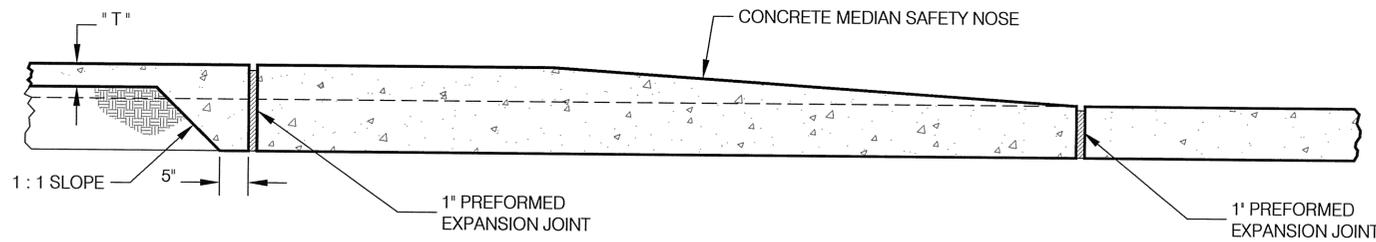


SECTION C - C

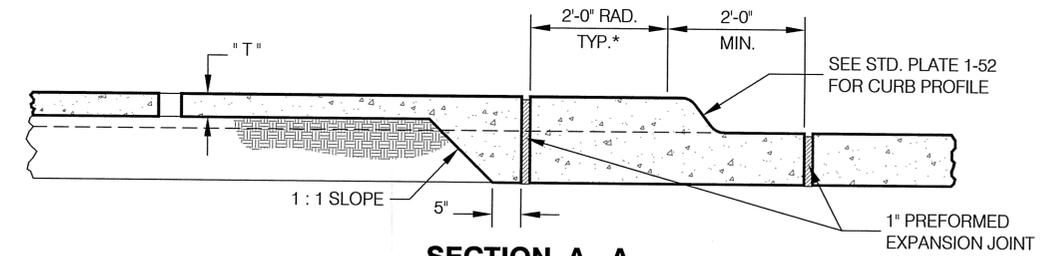


SECTION A - A

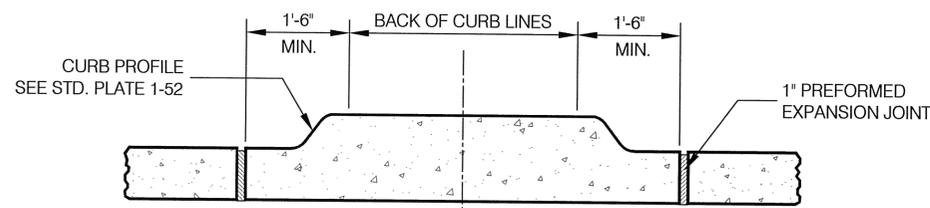

SECTION D - D

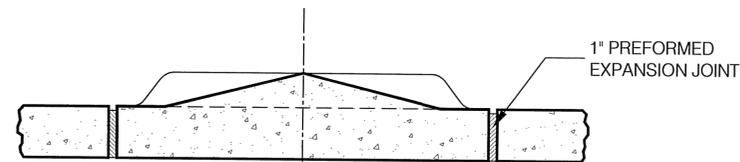


SECTION E - E

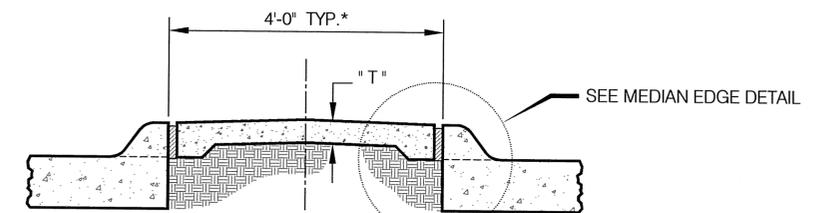


SECTION B - B

NOTES

1. CONCRETE MEDIAN SURFACING AND MEDIAN NOSE SHALL BE CONSTRUCTED IN CONFORMANCE WITH SECTION 503 OF THE STANDARD SPECIFICATIONS.
2. CONCRETE MEDIAN SURFACING SHALL BE COLORED AND IMPRINTED WITH A BRICK PATTERN. CONCRETE COLORING OR STAIN SHALL CONFORM TO SECTION 503 (E) OR (F).
3. THICKNESS "T" OF CONCRETE MEDIAN SURFACING SHALL BE 4" UNLESS OTHERWISE SPECIFIED IN THE PLANS.
4. A LONGITUDINAL CONTRACTION JOINT SHALL BE CONSTRUCTED IN ALL MEDIANS GREATER THAN 8'-0" IN WIDTH. JOINT DEPTH SHALL BE 1/4 "T". TRANSVERSE CONTRACTION JOINTS SHALL BE CONSTRUCTED IN ALL MEDIANS AT 8'-0" MAXIMUM INTERVALS. JOINT DEPTH SHALL BE 1/4 "T".
5. 1" PREFORMED EXPANSION JOINT MATERIAL SHALL BE PLACED TRANSVERSELY THROUGH MEDIAN AT 50' MAXIMUM INTERVALS. PREFORMED JOINT MATERIAL SHALL CONFORM TO SECTION 503 (G) OF THE STANDARD SPECIFICATIONS.
6. ALL PREFORMED EXPANSION JOINTS SHALL BE SEALED WITH HOT POURED JOINT SEALANT CONFORMING TO SECTION 503 (H) OF THE STANDARD SPECIFICATIONS.
7. TRANSVERSE AND LONGITUDINAL CONTRACTION JOINTS SHALL NOT BE FILLED.

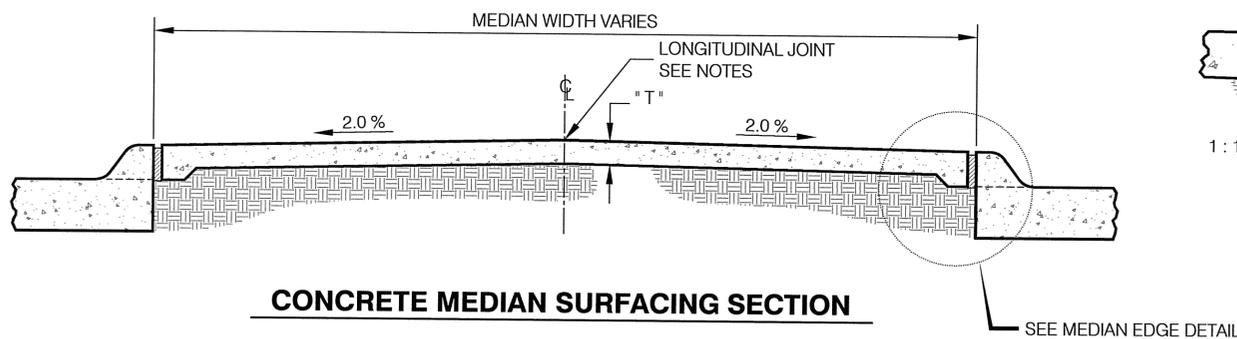

CONCRETE MEDIAN SURFACING SECTION

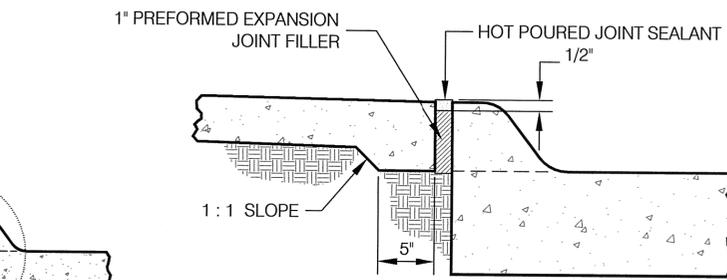

MEDIAN EDGE DETAIL

1	REVISION 12/20/2007	<i>Kirk RPH</i> DESIGN ENGINEER	CITY OF OMAHA PUBLIC WORKS DEPARTMENT		SHEET 2 / 2
		<i>Charlie Koopik</i> CITY ENGINEER	CONCRETE MEDIAN DETAILS		
					ISSUE DATE: MARCH 26, 2003