15' RADIUS PLAN CURBWALK

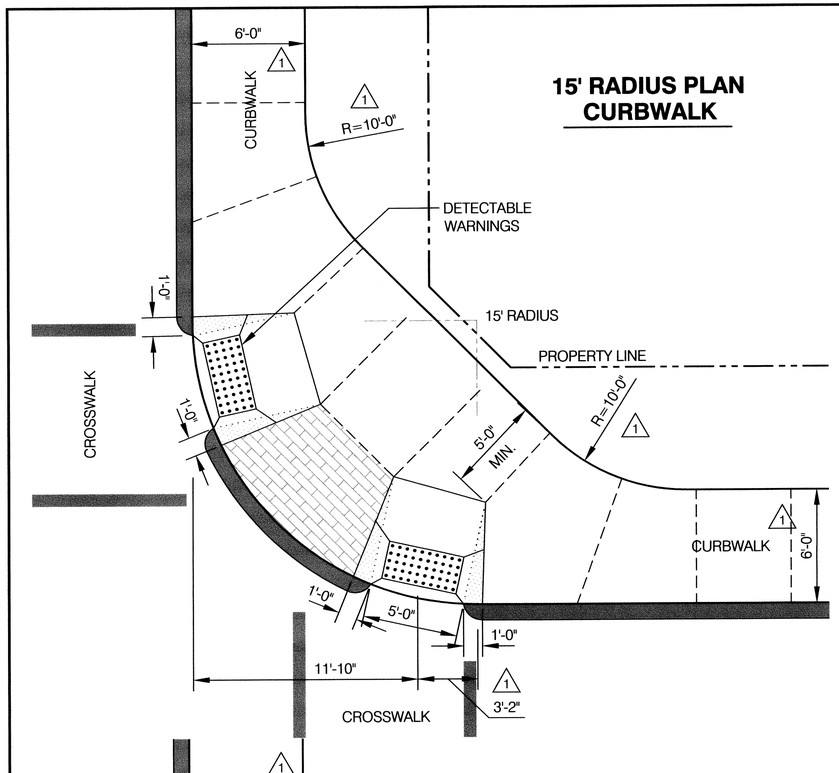

15' RADIUS PLAN 5' SIDEWALK, 6'-6" SETBACK

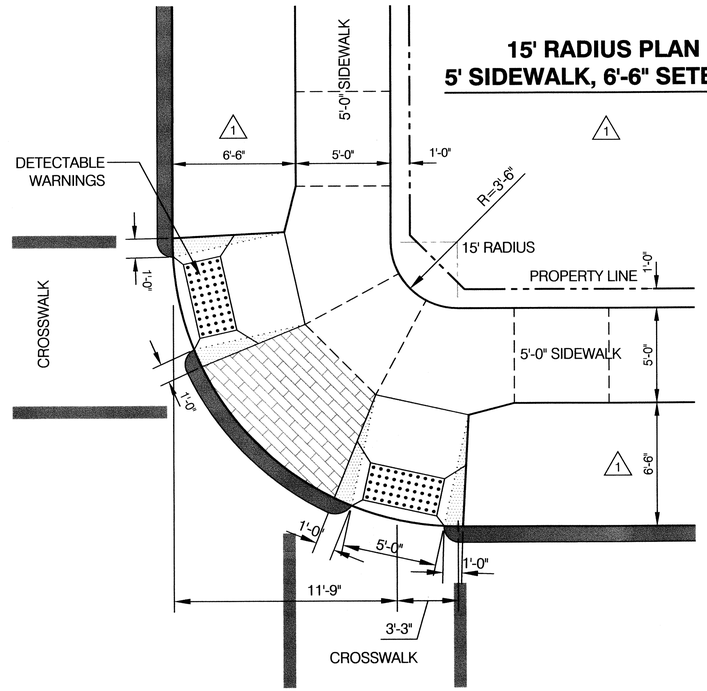

NOTES

1. DIMENSIONS ARE TYPICAL AT A 90° RADIUS RETURN. FOR NON TYPICAL SKEWED RETURNS SEE SHEET 6 OF 6.
2. IT IS NOT THE INTENT OF THIS SPECIAL DETAIL TO REVISE STANDARD PLATE 1-82. ANY CONFLICTS BETWEEN THE TWO, THE STANDARD PLATE 1-82 SHALL GOVERN.

IMPRINTED COLORED CONCRETE.

SINGLE RAMP PLAN 20' RADIUS 5' SIDEWALK, 6'-6" SETBACK

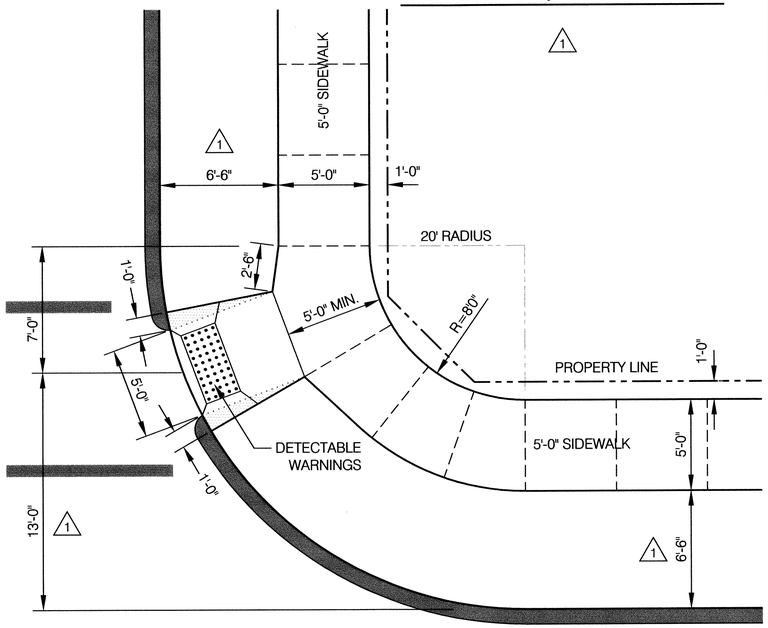

20' RADIUS PLAN CURBWALK

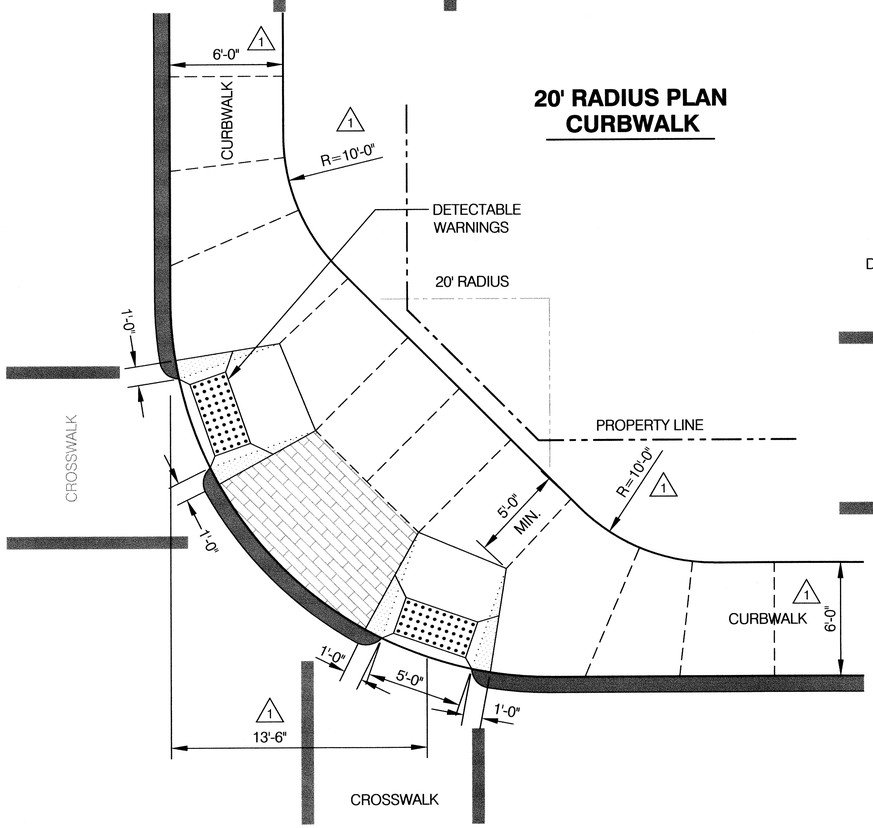

20' RADIUS PLAN 5' SIDEWALK, 6'-6" SETBACK

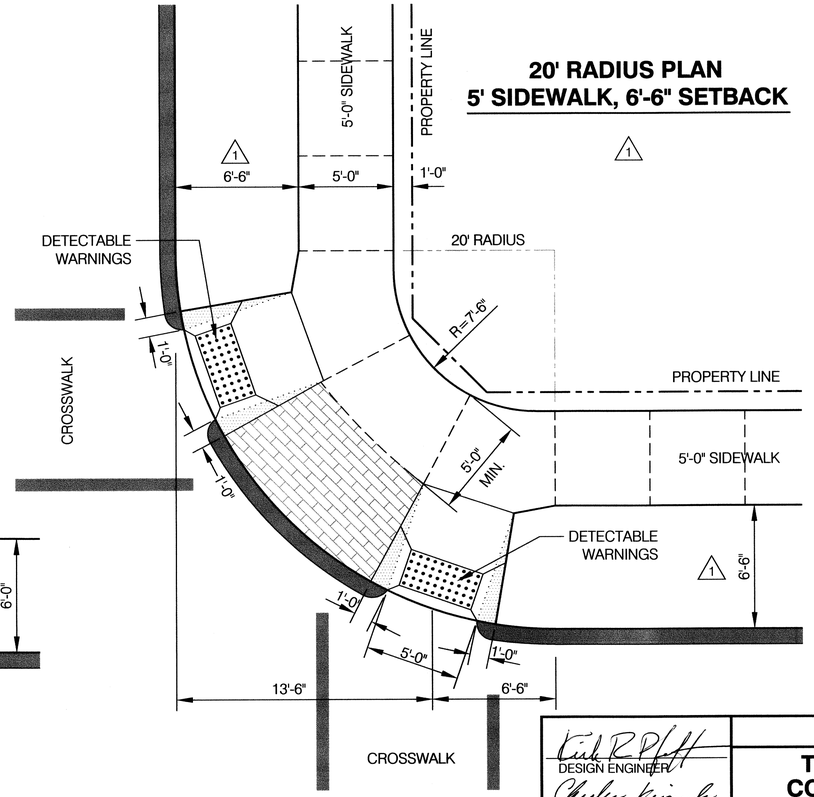

1	REVISION 2/8/2009

DESIGN ENGINEER

CITY ENGINEER

CITY OF OMAHA PUBLIC WORKS DEPARTMENT

TYPICAL NEW CONSTRUCTION CONCRETE CURB RAMP DETAILS 15' AND 20' RADII

SPECIAL DETAIL 1082

SHEET 2/6

ISSUE DATE: ..... APRIL 30, 2008