



TYPICAL SECTION - CUT

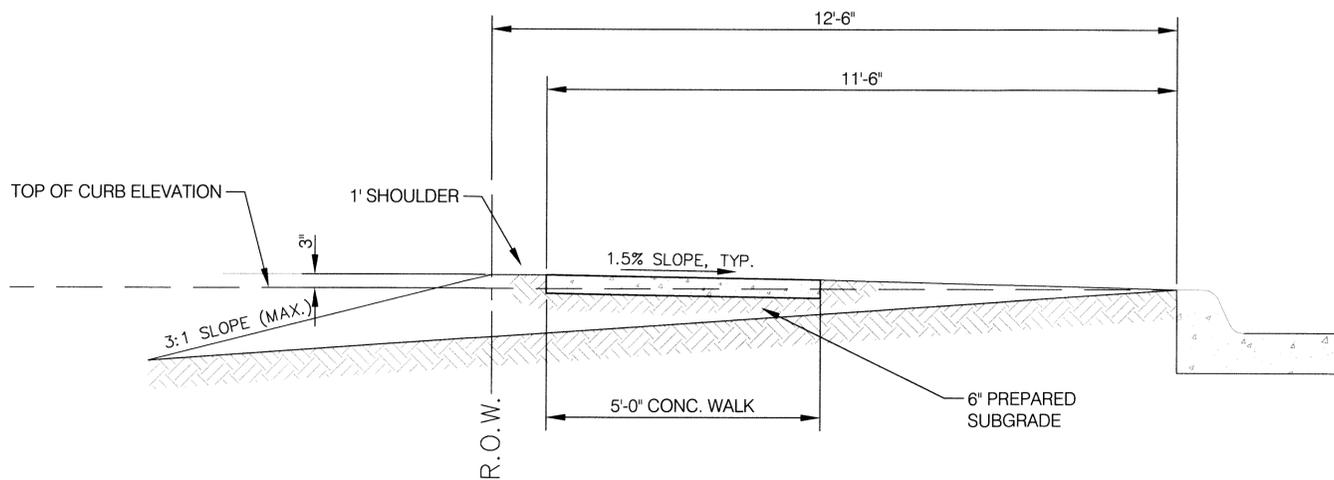


TYPICAL SECTION - FILL

ANY LOCATION DESIGNATED AS 1.5% SLOPE SHALL AT ALL TIMES BE LESS THAN 2% MAXIMUM AS CONSTRUCTED. ANY PORTION THAT EXCEEDS 2% SHALL BE REMOVED AND RECONSTRUCTED AT NO COST TO THE CITY OF OMAHA.

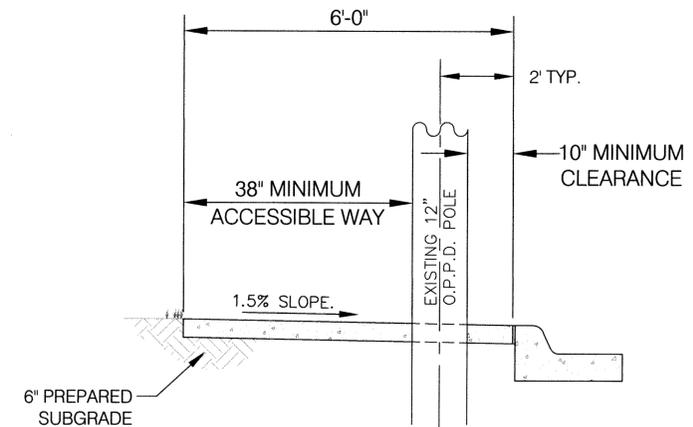

NOTE:  
IF SIDEWALK IS CONSTRUCTED 6' WIDE  
THERE WILL BE 38" OF CLEAR ACCESSIBLE WAY

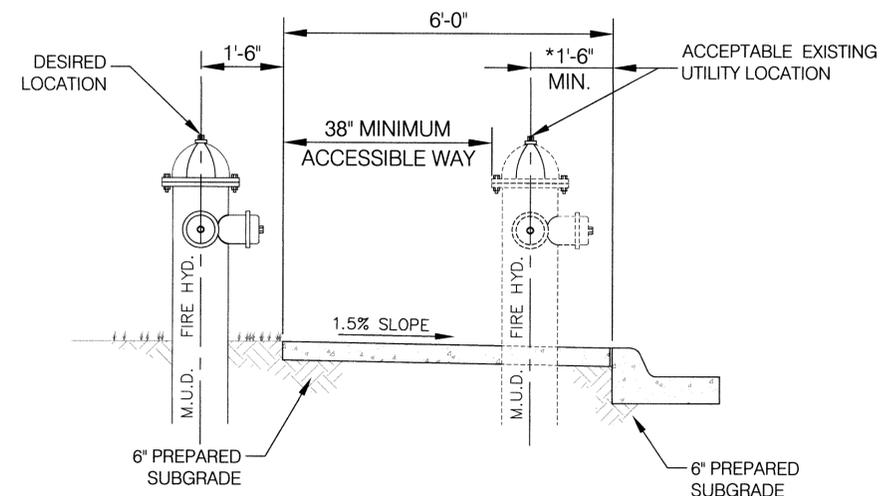

DETAILS SHOWING UTILITY PLACEMENT

\*NEW UTILITY MINIMUM DISTANCE IS 2'-8".

**NOTES**

- FOR STREETS DESIGNATED AS "GREEN STREETS", REFER TO THE NOTE ON THE STANDARD PLATES INDEX SHEET.
- CONSTRUCT CONCRETE PAVEMENT IN ACCORDANCE WITH SECTION 500 OF THE STANDARD SPECIFICATIONS. PREPARE SUBGRADE IN ACCORDANCE WITH SECTION 200.